


METRIC COPPER PIPE ADAPTOR

This Plasson fitting will convert from a Plasson Metric compression fitting to Copper Tube. Its unique 'Captive O-Ring' ensures a watertight connection. This fitting increases the stock flexibility of existing fittings and UV and corrosion resistance add durability making it a practical and efficient solution for diverse piping needs.



FEATURES AND BENEFITS

- Connects PE Pipe to Copper Tube
- Heavy Duty Polypropylene material
- Unique Captive O-Ring creates a watertight connection
- Rated to PN16 for water - High pressure applications
- Suitable for potable water (AS/NZS 4020), Watermark approved AS/NZS 4129:2020
- Suitable for water, recycled water, compressed air, and other industrial applications
- UV, chemical and corrosion resistant
- Impact and abrasion resistant
- O-rings and grip rings with higher chemical resistance available

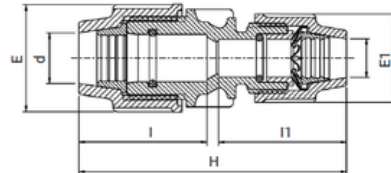

Product Code	Size d (PE) x d1 (Cu)	E	E1	H	I	I1	Bag	Carton	W	PN
7113001	16 x 15 (1/2")	48	39	111	57	50	1	250	85	16
7113002	16 x 20 (3/4")	54	39	113	58	50	1	200	102	16
7113003	20 x 15 (1/2")	48	48	122	59	59	1	200	103	16
7113004	20 x 20 (3/4")	54	48	119	58	57	1	150	120	16
7113005	25 x 15 (1/2")	54	48	119	58	57	1	150	115	16
7113006	25 x 20 (3/4")	54	54	126	61	61	1	150	132	16
7113007	25 x 25 (1")	54	54	126	61	61	1	150	120	16
7113008	32 x 20 (3/4")	64	54	133	67	58	1	120	163	16
7113009	32 x 25 (1")	64	54	133	67	58	1	120	156	16

TECHNICAL SPECIFICATIONS

- Body: Polypropylene, high-grade copolymer.
- Nut: Polypropylene, high-grade copolymer.
- Grip Ring: Acetal POM (CPVC also available).
- Seal: NBR or EPDM (FPM also available).
- Reinforcing Ring: Stainless steel on all female offtakes from 1" up to 4".
- Bolts (160mm fittings): Plated steel.
- Nuts (160mm fittings): Stainless steel.

INSTALLATION

Before installation ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are clean of sand, mud, stones etc. Do not over tighten nut when closing. Never use wrenches or spanners with handle lengths longer than 46 cm - excessive torque during tightening can spread nut cone and result in pull outs. If fittings are reused, Plasson recommend replacing the grip ring with a new one. Refer to individual installation instructions.

THREADS

- All threads conform to ISO-7/1 (BSPT),
- BS 21 - 1973, DIN 2999, NEN 3258, AS 1722 Part 1 - 1975.
- All internal (female) threads smaller than 3" are parallel (Rp).
- All other threads (male and female) are tapered (R).
- Plasson recommend the use of PTFE tape in threaded

CHEMICAL RESISTANCE

PLASSON Fittings are supplied, as standard, with polyacetal split rings and NBR O-rings which are suitable for water. For aggressive chemical applications CPVC split rings and EPDM or FPM O-rings can be supplied to produce a higher chemical resistance.

OPERATING TEMPERATURES

Refer to the PIPA POP013 guidelines.
 Link: <https://shorturl.at/jDKWZ>

QUALITY CERTIFICATES

Plasson fittings are tested and approved according to ISO 17885 (replaced ISO 14236), water and AS/NZ 4129.