


BUCCHI TANK ADAPTOR MALE - FEMALE THREADED - FPM

5180

BUCCHI Adaptors deliver a secure, reliable seal on tank walls 2 mm to 12 mm, even on curved or uneven walls, for water, fuel and aggressive liquids. One-person installation from outside the tank. PLASSON Australia is the exclusive distributor for BUCCHI. The Male-Female Threaded FPM adaptor has parallel G threads and an FPM (Viton) seal for aggressive liquids.

FEATURES AND BENEFITS

- Secure, reliable seal on tank walls 2–12 mm
- Suits curved or uneven tank walls
- Suitable for water, fuel and aggressive liquids
- One-person installation from outside the tank

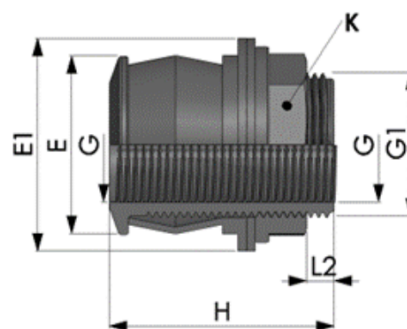

Product Code	Size G1 x G	E	E1	H	K	L2
5180013	½" x ⅜"	29	37	49	28	8
5180014	¾" x ½"	35	43	52	32	4
5180015	1" x ¾"	43	53	56	41	7
5180016	1¼" x 1"	52	62	65	50	6
5180017	1½" x 1¼"	59	68	75	57	15
5180018	2" x 1½"	70	80	91	70	31

Dimensions in mm.

INSTALLATION DATA

Adaptor Size	½"	¾"	1"	1¼"	1½"	2"
Tank wall min thickness (mm)	2	2	2	4	4	4
Tank wall max thickness (mm)	8	9	10	12	12	12
Drill hole size (mm)	29	35	43	52	59	70

TECHNICAL SPECIFICATIONS

- Seal: FPM (Viton).
- Parallel G threads.

INSTALLATION

One-person installation from outside the tank. Suits tank walls 2 mm to 12 mm, including curved or uneven walls — see the installation data above for wall thickness and drill-hole size per adaptor size. Refer to the installation instructions supplied with each fitting.

THREADS

- Parallel G threads, sealing with the FPM seal.
- Sizes ½" to 2".

OPERATING TEMPERATURES

Refer to the PIPA POP013 guidelines.

Link: <https://pipa.com.au/technical/pop-guidelines/>

DISTRIBUTION

PLASSON Australia is the exclusive distributor for BUCCHI. Call 1300 752 776 or email sales@plasson.com.au to find out more.