


90° RURAL ELBOW

7050

Plasson rural compression fittings go on the pipe and seal watertight instantly — the captive o-ring creates a seal before you even tighten the nut, and no special tools are required. The long fitting body ensures the seal is not affected by bending loads. This specification sheet covers the 90° Rural Elbow (series 7050) range.

FEATURES AND BENEFITS

- Instant sealing — captive o-ring seals before the nut is tightened
- No special tools required — tighten nuts firmly by hand
- Pull-out resistant — exceeds Australian Standards requirements
- Convertible to metric poly (blue line), PVC, steel and copper pipe

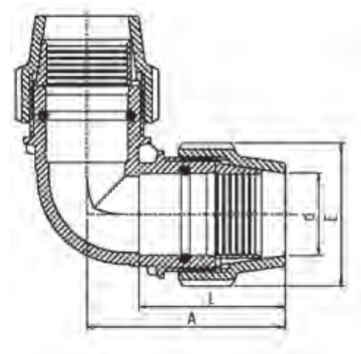

Product Code	Rural (d)	E	I	A	Bag	Carton	W
7050001	1/2"	39	50	63	10	350	57
7050002	3/4"	48	28	81	10	180	110
7050003	1"	54	30	88	10	150	140
7050004	1.1/4"	64	37	105	5	90	230
7050005	1.1/2"	82	50	137	1	50	400
7050006	2"	96	50	147	1	36	570

Dimensions in mm.

TECHNICAL SPECIFICATIONS

- Captive o-ring seal.
- Corrosion resistant and UV stabilised.
- Lightweight yet robust construction.

INSTALLATION

No special tools are required — do the nuts up firmly by hand and the job is done. Before installation ensure the pipe is cut square, free of scratches, and clean. Refer to the installation instructions supplied with each fitting.

OPERATING TEMPERATURES

Refer to the PIPA POP013 guidelines.

Link: <https://pipa.com.au/technical/pop-guidelines/>

QUALITY CERTIFICATES

All Plasson fittings exceed the pull-out requirements of Australian Standards, making Plasson ideal for submersible applications.