

90° THREADED TEE


5040

Plasson threaded fittings are manufactured from heavy-duty Polypropylene for increased strength and enhanced chemical resistance. The 90 degree Threaded Tee provides a three-way BSP connection with parallel female threads (Rp) on all outlets. Threads are made to ISO 7.1, equivalent to Australian Standard AS ISO 7.1. The enhanced stiffness of the Plasson Polypropylene fitting ensures a good seal between male and female threads. WaterMark approved and suitable for potable water (AS/NZS 4020), the fitting is UV, chemical and corrosion resistant — lightweight, durable and easy to work with.



FEATURES AND BENEFITS

- Heavy duty Polypropylene material
- Enhanced chemical resistance
- Rated to PN16 / PN10 for water (see table)
- Parallel female threads (Rp) to ISO 7.1
- Hexagonal body for easy use with all standard tools
- UV, chemical and corrosion resistant
- Certified to AS/NZS 4129:2020 – ISO Type 5 and WaterMark licences
- Suitable for potable water (AS/NZS 4020)

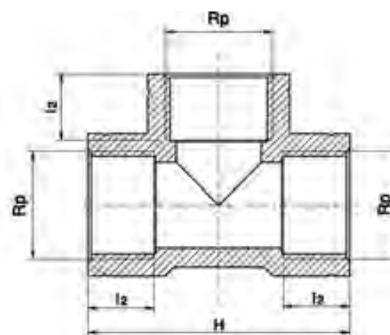

Product Code	Size Rp	H	l2	Bag	Carton	W	PN
5040001	½"	64	18	10	700	28	16
5040002	¾"	68	19	10	500	39	16
5040003	1"	81	21	10	260	61	16
5040006	1¼"	96	25	5	140	114	10
5040004	1½"	108	25	5	90	157	10
5040005	2"	130	30	5	60	205	10

Dimensions in mm. W = weight (g). PN = pressure rating for water at 20°C.

TECHNICAL SPECIFICATIONS

- Body: Polypropylene (PP), high-grade copolymer.
- Threads to ISO 7.1 / AS ISO 7.1.

INSTALLATION

A jointing medium – typically PTFE thread tape – is required to form a seal in BSP threaded connections. Ensure threads are clean and free of debris before assembly. Refer to individual installation instructions supplied with each fitting.

THREADS

- Female threads are parallel (BSPP), referred to as Rp.
- Plasson recommend the use of PTFE tape in BSP threaded connections.

OPERATING TEMPERATURES

Refer to the PIPA POP013 guidelines.

Link: <https://pipa.com.au/technical/pop-guidelines/>

QUALITY CERTIFICATES

Plasson threaded fittings are certified to AS/NZS 4129:2020 and hold both ISO Type 5 and WaterMark licences. Suitable for potable water in accordance with AS/NZS 4020.